



Stretched-wire system to prevent pigeons from setting on the ledges of buildings. Recommended for low bird pressures.



ACTION

Once fitted, **CABLE BIRD® WIRE** with its stretch cable spring action, prevents pigeons from landing on the ledges of buildings by obstructing the area.

The vibrations of the cable prevent birds from settling.

MAIN ADVANTAGES

- Very fast fitting, with silicone adhesive
- Dual-action for guaranteed results
- Discreet
- Support fitted with no grilling
- No risk for hurting the birds
- Ideal for windowsills
- Good value, economical

No deterioration of the support because of non-drilling

PROTECTION

- All types of edifices
- Cornices
- Guardrails
- Gutters
- Handrails
- Windowsills

DESCRIPTION

System of stainless-steel cable covered with nylon and tightened by a hook (which act as a spring).

CABLE BIRD® WIRE permits the **STEELINOX®** hooks to flex of about 1 cm.

CABLE BIRD® WIRE has a 5 years warranty*.

FITTING

CABLE BIRD® WIRE can be fitted to all types of support (zinc, wood, stone...).

Recommendation for optimised gluing :
Polyurethane glue.





Stretched-wire system to prevent pigeons from setting on the ledges of buildings. Recommended for low bird pressures.





CABLE BIRD® WIRE I

| REF. | DESCRIPTION | PACKAGING |
|--------|-------------------------|------------------|
| CBW001 | Cable Bird® Wire Simple | 100 linear meter |

- Product dimensions : 50 x 3,7 x 9 cm.
- Packaging dimensions : 23 x 19 x 12 cm box for 1,46 kg.
- Protected width : 3,7 to 6,7 cm.

One kit includes :

- 250 polycarbonate supports, mass UV-stabilised.
- 50 single **STEELINOX®** hooks Ø 1,2 mm.
The material used permits a high resistance, so high efficiency.
Spring effect combined cable / hook.
- 1x100 m spool of nylon coated stainless steel Ø 0,7 mm.
- 200 clamps.

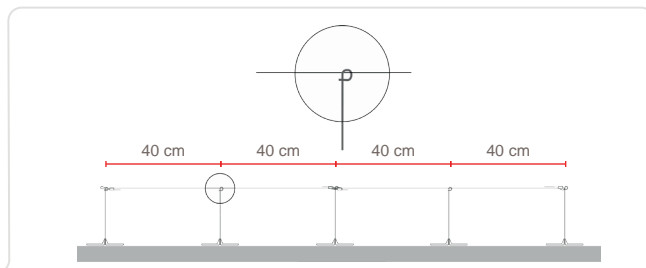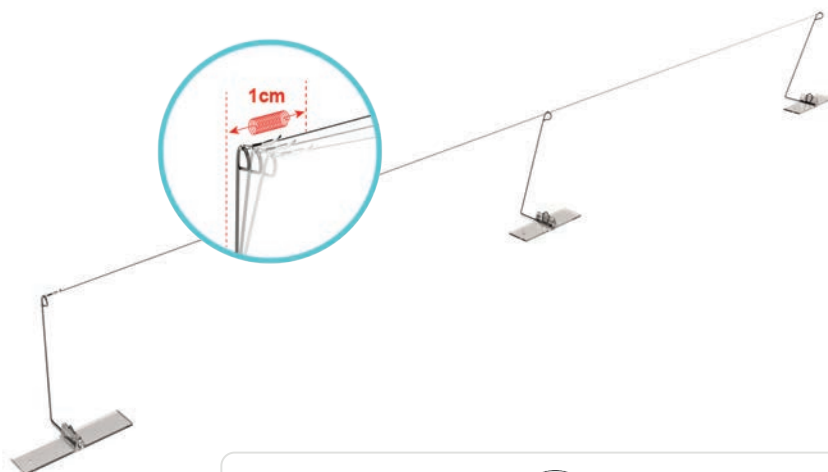

CABLE BIRD® WIRE 2

| REF. | DESCRIPTION | PACKAGING |
|--------|-------------------------|------------------|
| CBW002 | Cable Bird® Wire Double | 100 linear meter |

- Product dimensions : 50 x 5 x 9 cm.
- Packaging dimensions : 23 x 19 x 12 cm box for 2,08 kg.
- Protected width : 5 to 8 cm.

One kit includes :

- 250 polycarbonate supports, mass UV-stabilised.
- 50 double **STEELINOX®** hooks Ø 1,2 mm.
The material used permits a high resistance, so high efficiency.
Spring effect combined cable / hook.
- 2x100 m spool of nylon coated stainless steel Ø 0,7 mm.
- 400 clamps.

